

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 840 277 A2

22390 U.S. PTO
10/759000

011604

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

06.05.1998 Bulletin 1998/19

(51) Int. Cl.⁶: G09G 5/14

(21) Application number: 97119126.7

(22) Date of filing: 03.11.1997

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 01.11.1996 US 30105 P

(71) Applicant:

TEXAS INSTRUMENTS INCORPORATED
Dallas, Texas 75243 (US)

(72) Inventor: Chauvel, Gerard

06600 Antibes (FR)

(74) Representative:

Holt, Michael et al
Texas Instruments Limited,
Kempton Point,
68 Staines Road West
Sunbury-on-Thames, Middlesex TW16 7AX (GB)

(54) Window processing in an on screen display system

(57) An On Screen Display (OSD) system for a digital television set-top box is provided. The OSD can simultaneously display different kinds of pictures, (e.g., a bit-map, a graphic, a still video picture, a motion video picture or a background color). Each picture is in a different window that is managed by hardware. An OSD controller changes the display mode in real time during generation of the display. The OSD controller calculates, in real time for each line, the address and the size of each segment of a window that makes up the current line. A display memory is organized by window and located in an SDRAM; the same memory space is used for both the display's frame memory and the CPU's working area. The controller reads the segments from the memory space that contain the full windows created by the CPU. The controller reads the windows, segment by segment, and transfers data to an OSD FIFO during display, overlapped parts not visible are not read. For each pixel, the OSD decoder reads into the FIFO the bits required to display the current pixel. The number of bits per pixel varies during the display depending of the mode. An address calculator, a pixel selector and a controller select the bits of data from the FIFO to form the current pixel.

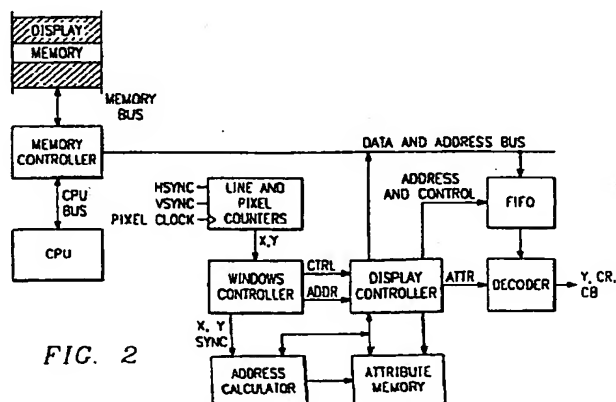


FIG. 2

FIELD OF THE INVENTION

5

BACKGROUND OF THE INVENTION

10

15

SUMMARY OF THE INVENTION

20

25

30

35

The present will now be further described by way of example, with reference to the accompanying drawings in which:

40

Figure 2 depicts in more detail some of the connections and blocks depicted in Figure 1;

Figure 3 depicts two windows having different color schemes that illustrate how the OSD system of the present invention displays windows;

45

Figure 5 depicts in more detail portions of the blocks depicted in Figure 2.

Figure 6 depicts the FIFO management flow for transfers from the CPU memory;

Figure 7 depicts the two cases for starting a new segment or pixel clock;

Figure 8 depicts a portion of the window controller of the present invention;

50

Figure 10 depicts the OSD flow of the present invention.

DETAILED DESCRIPTION

55

Most display systems use frame mode for OSD, and the CPU working space and display memory are separate. With hardware windowing mode (Figure 1) there is no duplication as memory space is same for the CPU and the OSD.

Hardware windowing mode reduces memory transfer, power dissipation and system cost.

The CPU builds each windows separately in different space of the SDRAM. Each window has its own display attributes i.e. display mode, resolution, position, and the number of bits to display a pixel of windows 1 and 2 can be different. The picture is composed directly by the hardware that reads the content of the windows in the CPU memory space. The display controller hardware reads only the data required to compose the current frame.

The OSD display controller sequentially reads each segment of windows 1 and 2 line by line from the left upper corner to the right lower corner. For each new line the OSD controller calculates the start address and block size of each segment of windows that compose the line. During display the OSD controller transfers the contents of the windows from the CPU memory segment by segment and changes the attributes of display for each transition of window.

OSD block diagram (Figure 2)

The OSD and the CPU communicate to the display memory (SDRAM) via the memory controller. The OSD memory addresses are generated by the display controller. The FIFO receives each segment of windows to be displayed. The OSD coprocessor is composed of the following blocks:

Line counter: The pixel counter is incremented by the pixel clock and line counter when the pixel counter is at the end of the line. It generates X, Y, that represent the pixel position on the screen and synchronization signals Hsyn and Vsync to control screen display.

Windows Controller: It contains the positions X and Y of each windows to be displayed on the current screen. The controller compares X, Y to the position of the windows and indicates to the display controller each window transition and the window number.

Address Calculator: For each new line it calculates the start address and block size of each segment of the windows and pushes the values into a stack in the attribute memory.

Display controller: Each new window transitions the display controller to read the new attribute from the attribute memory. The controller manages the FIFO. For each new line the FIFO is loaded block by block with the segments of windows that compose the line. When the FIFO is full the controller waits for the next access.

Decoder: For each pixel the decoder extracts from the FIFO the number of bits corresponding to the current pixel to be displayed. It transforms data bit in pixel.

Windows attributes:

Display modes: empty window for decimated video. Bitmap, YCrCb 4:4:4 graphics component, YCrCb 4:2:2 CCIR 601 component and background color.

Supports blending of bitmap, YCrCb 4:4:4, or YCrCb 4:2:2 with motion video and with an empty window.

Supports window mode and color mode blending.

Provides a programmable 256 entries Color Look Up table.

Outputs motion video or mixture with OSD in a programmable 422 or 444 digital component format.

Provides motion video or mixture with OSD to the on-chip NTSC/PAL encoder.

Each hardware window has the following attributes:

window position: any even pixel horizontal position on screen; windows with decimated video have to start from an even numbered video line also

window size: from 2 to 720 pixel wide (even values only) and 1 to 576 lines;

window base address;

data format: bitmap, YCrCb 4:4:4, YCrCb 4:2:2, and empty;

bitmap resolution: 1, 2, 4, and 8 bits per pixel;

full or half resolution for bitmap and YCrCb 4:4:4 windows;

bitmap color palette base address;

blend enable flag;

4 or 16 levels of blending;

transparency enable flag for YCrCb 4:4:4 and YCrCb 4:2:2; and

output channel control.

Example of OSD display with 2 windows

The Figure 3 shows an example of display with two overlapped windows. The window 2, on back is a bit map with 16 colors per pixel, a pixel require 4-bits into the frame memory to define the code of the color. The window 1 on top is a bit map with 2 colors per pixel, a pixel require 1-bit in the frame memory.

The position and dimension of the windows 1 is given by the attributes X_{10} , X_{11} , Y_{10} , Y_{11} . Horizontally the number of pixel is: $X_{11} - X_{10}$. Vertically the number of lines is: $Y_{11} - Y_{10}$. Same for window 2 with X_{20} , X_{21} , Y_{20} and Y_{21} .

The line Y_{10} contains 3 segments. The first segment at the beginning of window 2, starts in position X_{20} and ends in P_a . The segment 2, window 1, is displayed on top of window 2, starts in X_{10} and end in P_c . The third segment is the end of the window 2, start in P_d and end in X_{21} . Segments 1 and 3 come from the memory space of window 2 and segment 2 from the memory space of window 1. The contents of the window 2 memory between P_a and P_b are ignored and not transferred to the FIFO.

The Figure 4 details the detail of process for this line and the flow from the memory to the FIFO. The CPU has composed two windows in separate memory space. The windows are describe line by line, each new line start with a new 32-bit word. The first pixel of a line is aligned in the msb of the word. If the number of bits to describe the content of the line is not modulo 32, some bits of the word can be ignored. The window 2 has 4-bit per pixel, the first segment $W_{2.1}$ contain 2 words but only 15 pixel. The last 4-bits are not used for display. The second segment $W_{1.1}$ has 2 words, the window 1 has 1-bit per pixel and 62 pixel horizontally. The last 2-bits of the second word are ignored. The third segment $W_{2.2}$ is not a beginning of a new line, the pixel P_c is not necessary aligned at the word boundary, in this example P_c is the second pixel of the first word of this segment, this position is referred by the segment offset $W_{2.2}$.

Display controller and decoder

Figure 5 shows different blocks of OSD coprocessor described previously. This chapter describe the detail of each blocks of the window controller, display controller and decoder.

FIFO and memory controller

The FIFO is a 32-bits dual port memory. The data is received from the main memory SDRAM and used by the Pixel selector. The transfer requests and addresses generation are controlled by the FIFO memory controller: it generate write and read addresses and control signals to the FIFO and the memory address and control to the traffic controller that access the SDRAM. The OSD data is read by segment of window in burst. Each new segment the controller access to the attributes RAM to get memory address and segment size.

Figure 6 shows the FIFO management flow for the transfers from the SDRAM.

At the beginning of each new active line, the FIFO is empty the Read and Write pointer are equal.

The address calculator calculate the start address of each segment of the windows that compose the current line and store into the Attribute RAM.

The FIFO controller generate the Read segment request to the OSD Memory controller in order to read the first segment address $Sa[23:0]$ and segment size $Ss[8:0]$ stored previously into the attribute RAM.

If the segment is larger than the size of the FIFO the controller split the segment by burst. When the FIFO is full or cannot contain the block the FIFO controller is waiting.

When the full segment of window has been read the FIFO controller generate a request to access the next segment composing the current line. The pixel selector read the data word by word $F[31:0]$. The number of bit per pixel or pixel per word can vary for each segment of window so the time between two access to the FIFO is variable. A new segment start always with a new word. As shown Figures 3 and 4 window 1 overlaps window 2, P_a is the last pixel of window 2 for this segment. In this case a part of the word of the first segment of window 2 will not be used by the pixel selector to generate a pixel. Address clock signal is generated to access a new word into the FIFO.

Pixel counter

There are two different cases (Figure 7): a new segment start or new pixel clock. When a new segment of window starts the pixel counter logic generate the address clock signal to the FIFO controller in order to transfer the first word of this segment to the pixel selector.

The window controller generate the "Load" signal to indicate a window transition. The "Load" transfer the "Segment offset $So[4:0]$ " corresponding to this new segment of window to the pixel counter.

There are two situations represented in Figure 4:

The segment $W_{2.1}$ is the left border of the window, $So[4:0]=0$. Window 2 has 4-bit per pixel, the value of the pixel counter that generate $Mux_S[1:0]$ concatenated with $Bs_S[2:0]$ will be $(So[4:0] - Bp[3:0]) = 28$ to point to the first pixel of this word.

The segment $W_{2.2}$ is overlapped partly with window 1. The first pixel of the first word is not displayed. $So[4:0] = (0 - Bp[3:0]) = 28$. The pixel counter will be $So[4:0] - Bp[3:0] = 24$ to point to the second pixel of this word.

EP 0 840 277 A2

The "Pixel clock" decrements the Pixel counter by 0, 1, 2, 4 or 8 depending of the number of bit per pixel Bp[3:0] of the current window. Address clock is generated when the Pixel counter is equal to zero.

Pixel selector

The pixel selector receive the 32-bit data word from the FIFO outputs F[31:0]. It contain two parts, a byte multiplexor and a barrel shifter. The byte multiplexor selects one of the four bytes F[31:24], F[23:16], F[15:8] or F[7:0] in function of Mux_S[1:0] as shown table 1a. The barrel shifter shift right the byte by 0 to 7 bit position as shown Table 1b.

Byte Mux 4:1 x 8		Shifter 4, 2, 1		Pixel counter				
Control Mux_S[1:0]	Bm[7:0]	Control Bs_S[2:0]	Bs[7:0] valid Outputs	Mux_S[1:0] Bs[7:0] =				
1 1	F[31:24]	1 1 1	Bm[7]	0 0				
1 0	F[23:16]	1 1 0	Bm[7:6]	0 1				
0 1	F[15:8]	1 0 1	Bm[7:6:5]	1 0				
0 0	F[7:0]	1 0 0	Bm[7:6:5:4]	1 1				
		0 1 1	Bm[7:6:5:4:3]	Bs_S[2:0]	F[31]	F[23]	F[15]	F[7]
		0 1 0	Bm[7:6:5:4:3:2]	1 1 1	F[31]	F[23]	F[15]	F[7]
		0 0 1	Bm[7:6:5:4:3:2:1]	1 1 0	F[31:30]	F[23:22]	F[15:14]	F[7:6]
		0 0 0	Bm[7:6:5:4:3:2:1:0]	1 0 1	F[31:29]	F[23:21]	F[15:13]	F[7:5]
				1 0 0	F[31:28]	F[23:20]	F[15:12]	F[7:4]
				0 1 1	F[31:27]	F[23:19]	F[15:11]	F[7:3]
				0 1 0	F[31:26]	F[23:18]	F[15:10]	F[7:2]
				0 0 1	F[31:25]	F[23:17]	F[15:9]	F[7:1]
				0 0 0	F[31:24]	F[23:16]	F[15:8]	F[7:0]

Table 1a, 1b and 1c: Pixel Selector Control

The 5-bit pixel counter generates Mux_S[1:0]&Bs_S[2:], the table 1c indicate the value of Bs[7:0] in function of the pixel counter value. This table combine 1a and 1b.

Multiplexer

The color multiplexer receive data Bs[7:0] from the barrel shifter and Base[7:0] from the attribute register. It is controlled by number of bit per pixel Bp[3:0], coming from the attribute register. According to the table 1d the multiplexer select 0, 1, 2, 4 or 8 bits of the Base address color Base[7:0] and its complement in Bs[7:0] in order to form the outputs Pm[7:0].

Pixel Multiplier outputs

Default Cursor		Bit per Pixel Bp[3:0]				Mux output Pm[7:0]
		8	4	2	1	
1	0	X	X	X	X	Def[7:0]
X	1	X	X	X	X	Cur[7:0]
0	0	0	0	0	0	Base[7:0]
0	0	0	0	0	1	Base[7:1] & Bs[0]
0	0	0	0	1	1	Base[7:2] & Bs[1:0]
0	0	0	1	1	1	Base[7:4] & Bs[3:0]
0	0	1	1	1	1	Bs[7:0]

Table 1d: Pixel Multiplexer

When the cursor is detected by the window controller Base[7:0] is equal to the cursor color. When the display does not contain any OSD window or motion video, the default color is selected. During OSD window the Base[7:0] comes from the current window attribute register.

The output of the multiplexor generate Pixel_Mux[7:0] used in bit-map mode to select one of the 256 colors of the CLUT. In graphic mode or still video picture Pixel_Mux[7:0] is one color component Luma or Chroma. Graphic mode requires tree color components per pixel, the Pixel_clock is 3 times faster than in bit-map. In still video picture 2 color component are required during one pixel duration. The display output is tree 8-bits words, Y, Cr and Cb.

Global and window attribute registers

The global attribute register contain cursor and default color, these values are set by the CPU. The window attribute register contain the attribute for the current window:

- Display mode: bit-map, graphic, still video or empty.
- Number of bit per pixel or color component: 0, 1, 2, 4 or 8 bits.
- The bit-map CLUT base address.
- Blending....

The attributes are located into the Attribute RAM. The window attributes change every window transition. The segment attribute are sent through this block to the FIFO controller or pixel counter.

Window controller

The window controller (Figure 8) contains a content addressable memory CAM, flip flop and priority encoder. The CAM contain the attributes of position and size of the windows to be displayed on the current frame. Each window require 4 words to indicate horizontally the coordinates of the first and last pixel and vertically the coordinates of the first and last line. A 32_words CAM support 8 windows.

The CAM compare the value of the pixel and line counters respectively X and Y. When Y counter match a value Yn0, a new window start vertically, the corresponding RS flip-flop is set Wn_Y=1. When Y counter match a value Yn1, the corresponding window end vertically, the RS flip-flop Wn_Y is reset. The process is the same horizontally. Wn_Y and Wn_X are combined to indicate that the X, Y counter crosses an active window. The indices "n" indicate the window number. Several windows can be overlapped, the priority encoder define the display order on the screen. The indices "n=0" correspond to the cursor always on top. Outputs of priority encoder are HIT and OSD_W, HIT generates the attribute clock and OSD_W select the memory attribute address corresponding to the active window. The HIT generate the access request to the attribute RAM at the address given by the priority encoder. The attributes are transferred to the window attribute register.

The CAM can be accessed by the CPU to set the position of the windows during initialization. The address calculator access the CAM each line for real time address calculation.

Pseudo code for the window controller

Y = Y+1;

Increment line number when end of line

Y=0

when end of frame

FOR n= 0 to 7

Check if the current line number Y cross one or several
windows

IF Y = Yn0 THEN Wn_Y = 1;

Check if the window "n" starts vertically

#

ELSE IF $Y = Y_{n1}$ $Wn_Y = 0$;

Check if the window "n" ends vertically

END;

All windows with $Wn_Y = 1$ are vertically valid and cross the current line

$X = X + 1$;

Increment pixel number

FOR $n = 0$ to 7

Check if the current pixel number X cross one or several windows

IF $X = X_{n0}$ THEN $Wn_X = 1$;

Check if the window "n" starts horizontally

ELSE IF $X = Y_{n1}$ $Wn_X = 0$;

Check if the window "n" ends horizontally

END;

Windows with $Wn_X = 1$ are horizontally valid and cross the current pixel number

FOR $n = 0$ to 7

Define valid window: check if the current pixel crosses a window "

$Wn_XY = Wn_X \text{ AND } Wn_Y$;

Check all windows that contain the current pixel

END;

$M = 8$

Define which window is visible

FOR $n = 7$ to 0

IF $Wn_XY = 1$ THEN $M = n$;

Check valid window with the lower "n"

END;

$T = M$;

The current pixel is in the window M. If M=8 the pixel is not in a window

5

IF T(n-1) < OR > T THEN HIT=1;

10

If the window number of the previous and current pixel are different, HIT indicate a window transition

15

IF M = 0 THEN Cursor = 1

Generate Cursor or OSD_W address

20

ELSE OSD_W = M;

END;

END;

25

Memory controller

30

The memory controller manage the access to the Attribute RAM and CAM. The access are:
CPU access:

CAM: The CPU program position and priority of the windows. This access is done during vertical blanking or when before OSD display.

35

Attribute RAM: to load the CLUT, windows attributes and Base address.

Address calculator access: During horizontal blanking to the CAM and Attribute RAM to calculate the segment address, size and offset.

40

FIFO controller access: When read segment request is generated, to the Attribute RAM to read the next segment address and size for data transfer between SDRAM and FIFO.

Window controller access: Each window transition to the Attribute RAM to read window attribute and segment offset.

Address calculator

45

The address calculator is the key element of hardware windowing system. It calculates the attributes of each segment making up the current display line: first address, size in word and offset of the first pixel and store the values in the segments stack. The address calculator (AC) receive vertical and horizontal synchronization signals that indicate the beginning of a new frame or a line.

50

Each new frame the AC transfers the base address Ba0 to Ba7 to the corresponding line pointers "L0" to L7. The line pointers are located in the Attribute RAM. Ba(n) is the base address of the window in the SDRAM.

The example Figure 9 shows 4 overlapped windows, the line Y cross horizontally all windows start and end. Each line during the active display area the AC get the active windows for the current line, the window controller return an 8-bit value. The "1" represent the active, first bit is window 0 and last bit window 7: W0_XY ... W7_XY = 0,1,1,1,1,0,0,0

55

For each active windows the (Wn_XY=1) the AC read the content Xn0 and Xn1 of the CAM, and sort windows indices in the order of transitions from the left to the right. For the given example the sorted values are: X20, X40, X30, X10, X31, X21, X11, X41 (X20, is the lower value X41 the bigger)

From the left to the right when a window start the AC selects in that window the values with lower indices. For exam-

ple the first window start in X20, the first selection is done by selecting only the values < X20 between X20, and X21, the values X40, X30, X31 are eliminated, X10 is maintained. The next window start is X10 there are no values between X10 and X11. There is no more window start after X11, X41 is valid. The selected active transition are: X20, X10, X11, X41.

This line has 3 segments: S1 between X20 and X10; S2 between X10 and X11 and S3 between X11 and X41. S1 is window 2, S2 is window 1 and S3 window 4. The AC calculate the segment address. For each window start the segment address Sa[23:0] is equal to the line pointer Ln.

Example:

S1: Sa[23:0] = L2;
S2: Sa[23:0] = L1;

The last segment (S3) is the end of window 4. S3 starts in (X11) the AC calculate the number pixels and entire words from the beginning of window 4 to (X11). The number of pixel is (X11 - X40). The number of words is (X11 - X40)*K4/32, K4 is the number of bit per pixel for the window 4 and 32 the number of bits per words. This value added to the line pointer (L4) give the segment address S3: Sa[23:0].

The block size is the entire number of words between 2 transitions. The offset that points the first pixel is the remainder.

S1: $(X_{10} - X_{20}) \cdot K_2 / 32 \Rightarrow Ss[8:0]$ and $So[4:0]$
 S2: $(X_{11} - X_{10}) \cdot K_1 / 32 \Rightarrow Ss[8:0]$ and $So[4:0]$
 S3: $(X_{41} - X_{11}) \cdot K_4 / 32 \Rightarrow Ss[8:0]$ and $So[4:0]$

The entire part of the equation give the number of words $Ss[8:0]$. The decimal part the offset $So[4:0]$. If $So[4:0] > 0$ the number of words is $Ss[8:0]+1$.

The last step the line pointer is incremented by the number of entire words to describe a line of the active windows.

$$L1 = L1 + (X11 - X10) * K1 / 32 + 1$$

if the number of bits divided by 32 is > 0

$$L2 = L2 + (X21 - X20) * K2 / 32 + 1$$

if the number of bits divided by 32 is > 0

$$L3 = L3 + (X31 - X30) * K3 / 32 + 1$$

if the number of bits divided by 32 is > 0

$$L4 = L4 + (X41 - X40) * K4 / 32 + 1$$

OSD system simultaneously displays different kinds of pictures: bit-map, graphic, still video picture, motion video picture or background color. Each picture is in a different window that is managed by hardware.

A display memory organized by windows is located in an SDRAM; the same memory space in the SDRAM is used for both the display frame memory and for the CPU working area.

An address calculator calculates the attributes of each of the segments that make up the current display line (first address, size in word and offset of the first pixel) and stores these values in the segments stack.

The OSD data is read in a burst by window segment. For each new segment, the controller accesses the attributes RAM to get a memory address and segment size.

Claims

1. An on-screen display system, comprising:

a central processing unit;
a memory connected to said central processing unit;
a hardware window display controller connected to said memory; and
a display connected to said controller.

2. An on-screen display co-processor, comprising:

a FIFO;
a decoder;
a display controller interconnected with said FIFO and decoder;

EP 0 840 277 A2

an attribute memory interconnected with said controller;
a windows controller interconnected with said controller;
line and pixel counters interconnected with said windows controller; and
an address calculator interconnected with said windows controller, controller and attribute memory.

5

10

15

20

25

30



35

40

45

50

55

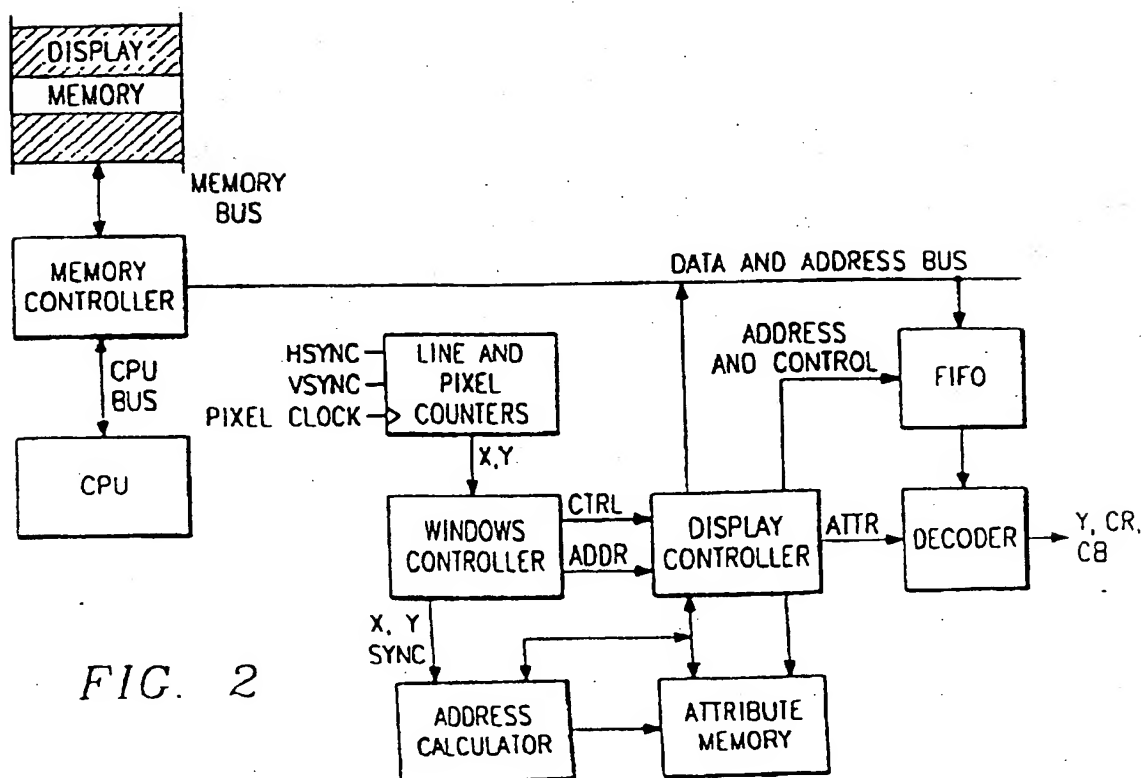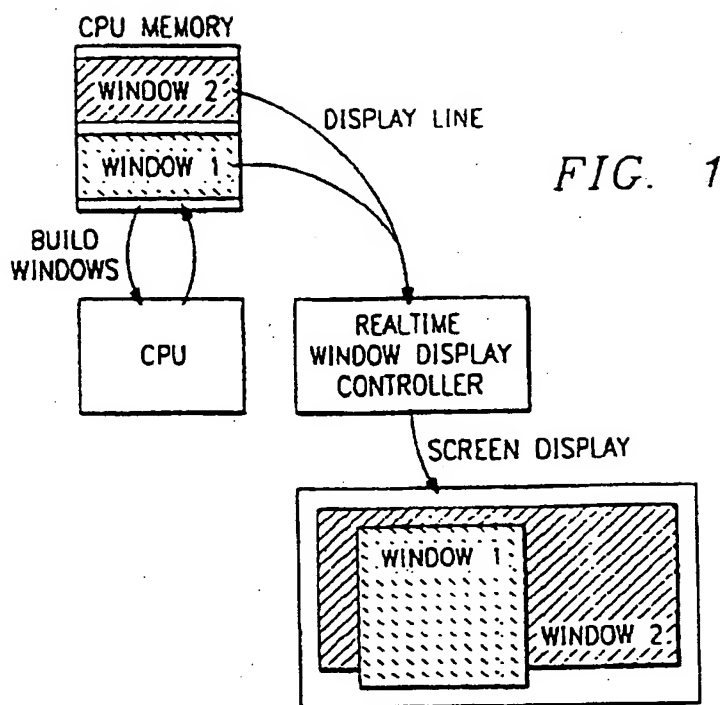

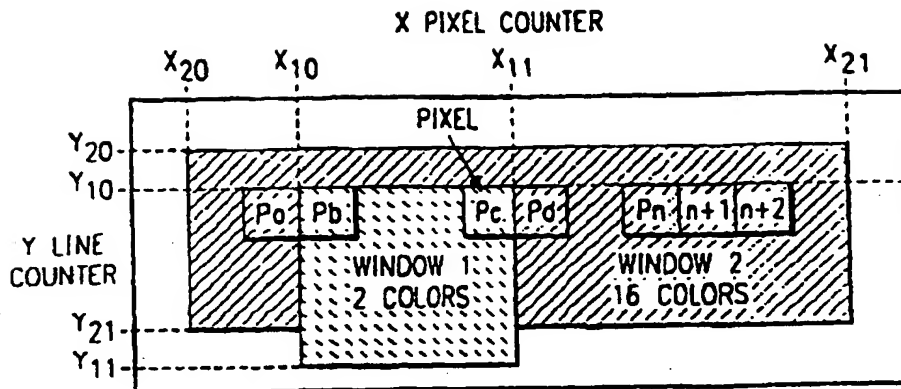


FIG. 3

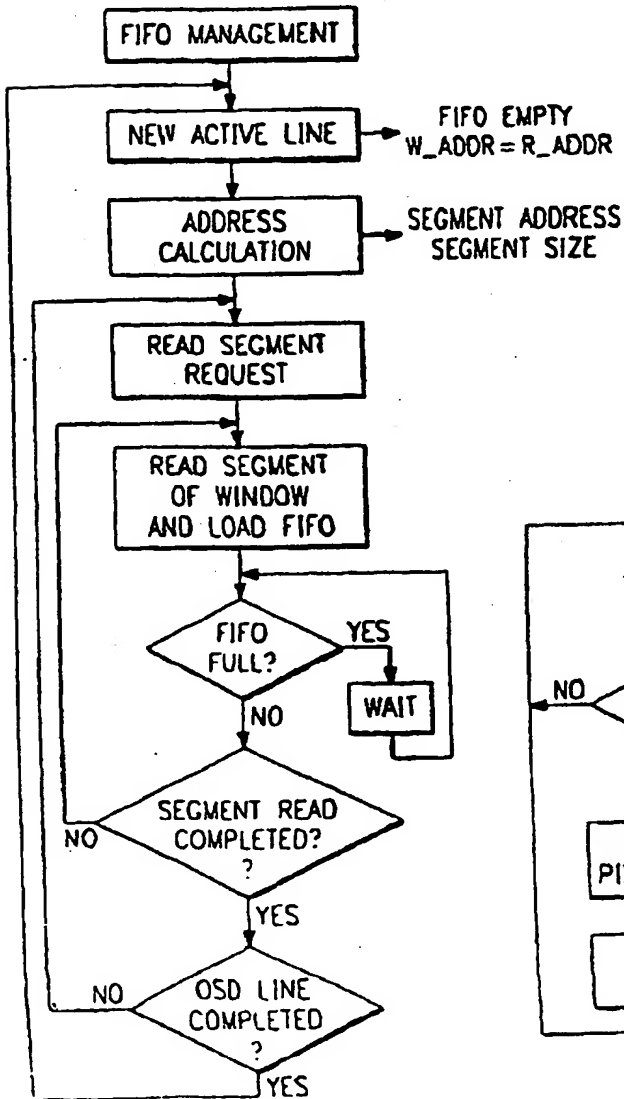


FIG. 6

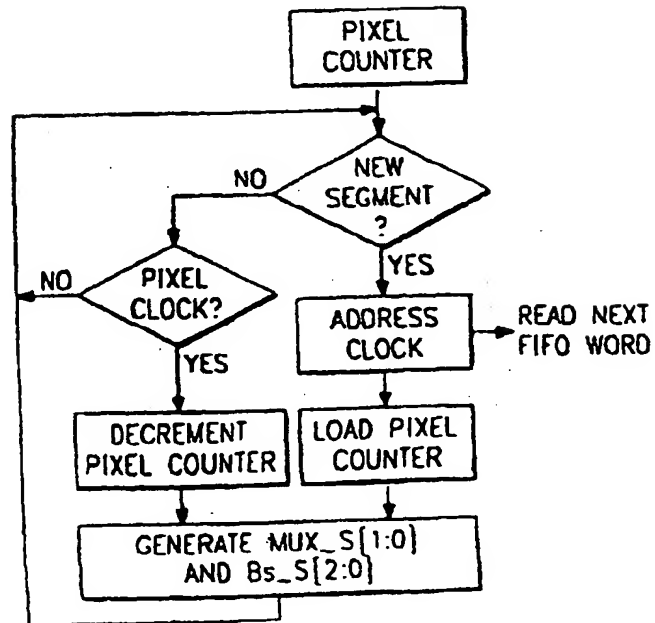


FIG. 7





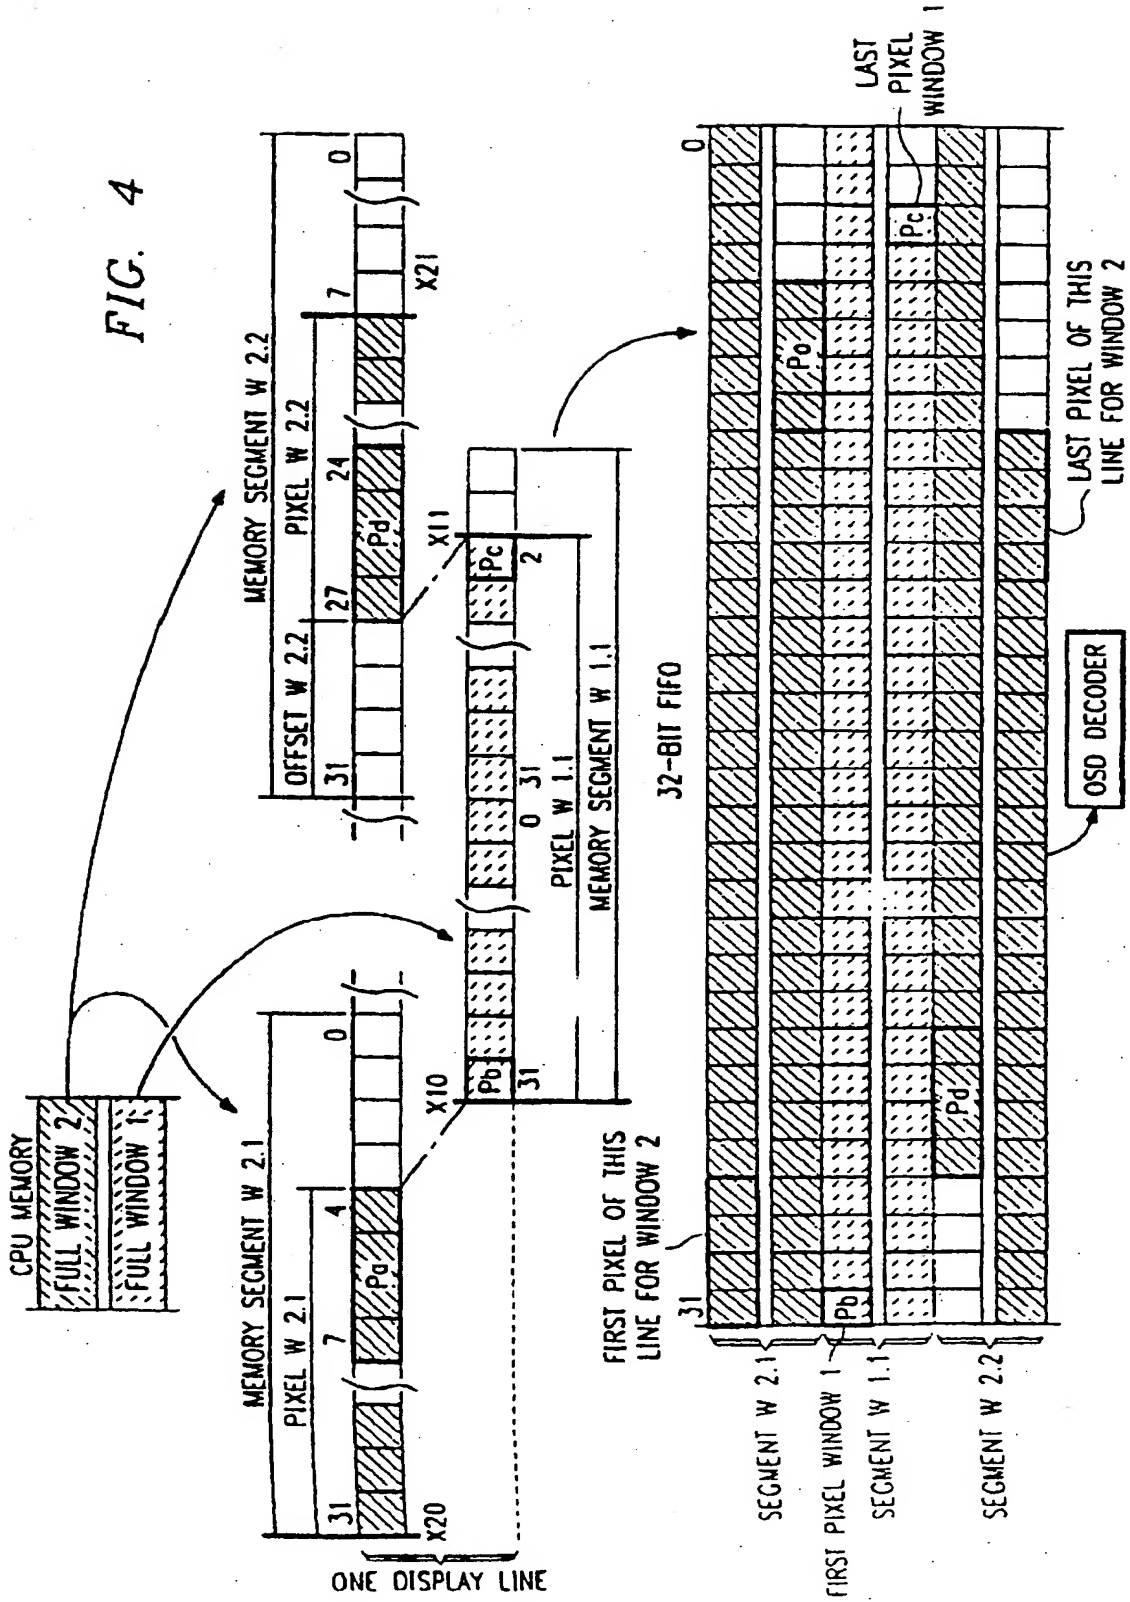


FIG. 5

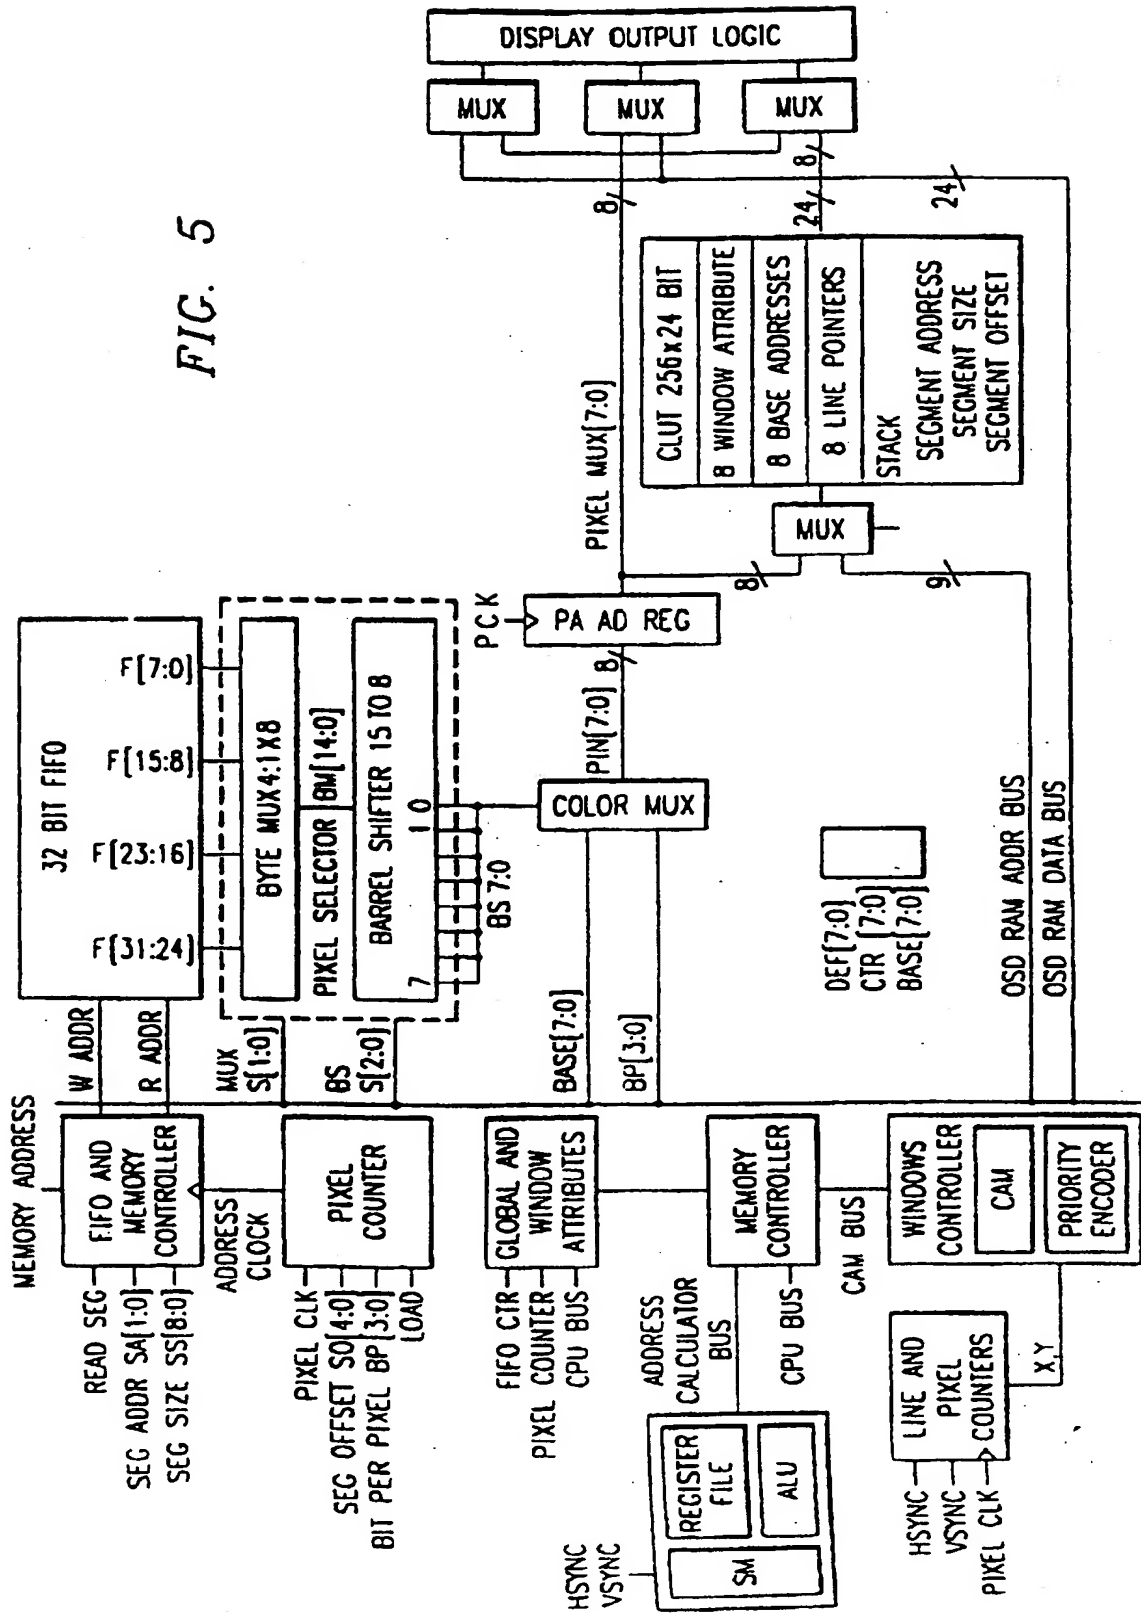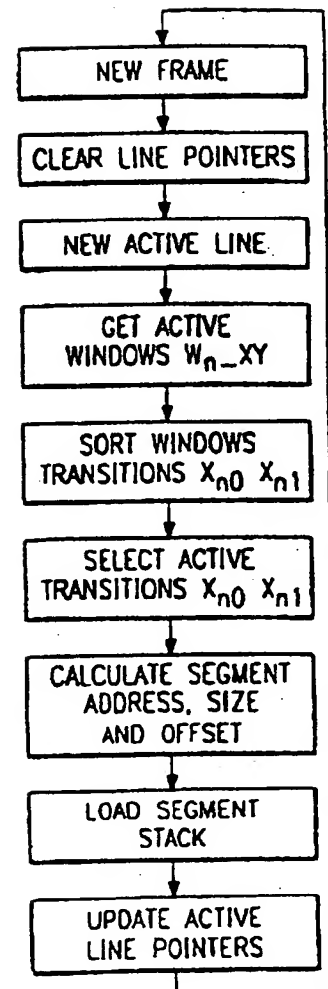

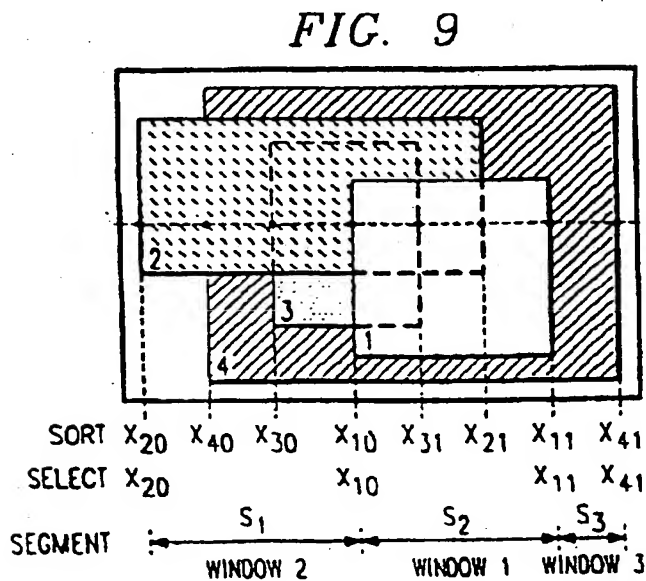

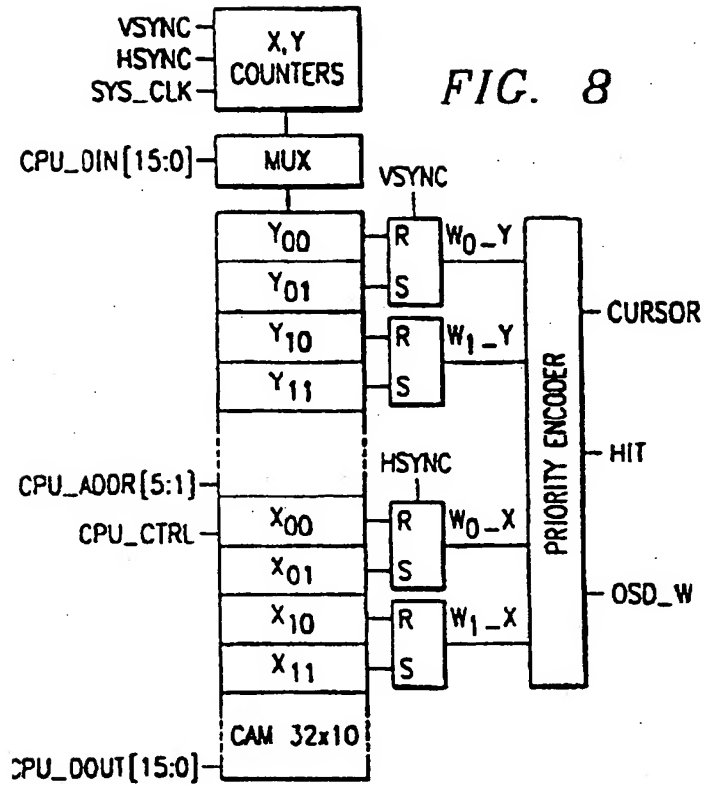

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
23.06.1999 Bulletin 1999/25

(51) Int. Cl.⁶: **G09G 5/14**

(43) Date of publication A2:
06.05.1998 Bulletin 1998/19

(21) Application number: **97119126.7**

(22) Date of filing: **03.11.1997**

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

(30) Priority: **01.11.1996 US 30105 P**

(71) Applicant:
TEXAS INSTRUMENTS INCORPORATED
Dallas, Texas 75243 (US)

(72) Inventor: **Chauvel, Gerard**
06600 Antibes (FR)

(74) Representative:
Holt, Michael et al
Texas Instruments Limited,
P.O. Box 5069
Northampton NN4 7ZE (GB)

(54) **Window processing in an on screen display system**

(57) An On Screen Display (OSD) system for a digital television set-top box is provided. The OSD can simultaneously display different kinds of pictures, (e.g., a bit-map, a graphic, a still video picture, a motion video picture or a background color). Each picture is in a different window that is managed by hardware. An OSD controller changes the display mode in real time during generation of the display. The OSD controller calculates, in real time for each line, the address and the size of each segment of a window that makes up the current line. A display memory is organized by window and located in an SDRAM; the same memory space is used for both the display's frame memory and the CPU's working area. The controller reads the segments from the memory space that contain the full windows created by the CPU. The controller reads the windows, segment by segment, and transfers data to an OSD FIFO during display, overlapped parts not visible are not read. For each pixel, the OSD decoder reads into the FIFO the bits required to display the current pixel. The number of bits per pixel varies during the display depending of the mode. An address calculator, a pixel selector and a controller select the bits of data from the FIFO to form the current pixel.

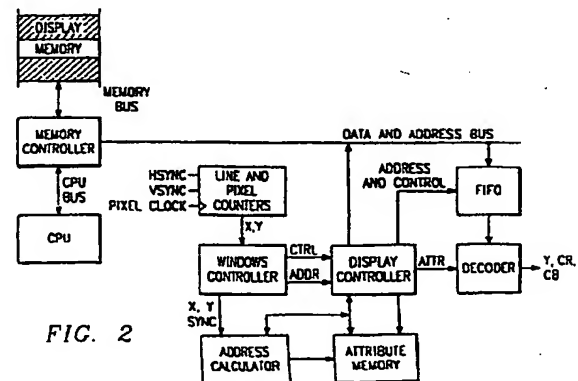


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 11 9126

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 4 953 027 A (TONG ET AL.) 28 August 1990 * figures 1,2,11 * * column 7, line 59 - column 8, line 46 * * column 2, line 53 - column 61 * * column 1, line 47 - line 60 * ---	1	G09G5/14
X	EP 0 276 884 A (RADIOTECHNIQUE COMPELEC ;PHILIPS NV (NL)) 3 August 1988 ---	1	
A	* page 3, line 22 - page 4, line 37 * * page 5, line 29 - line 32 * * page 5, line 53 - page 6, line 11 * * figures 1,2 * ---	2	
X	EP 0 280 582 A (CAPLIN CYBERNETICS) 31 August 1988 ---	1	
A	* page 5, line 54 - line 62 * * page 6, line 12 - page 7, line 38 * * figures 3-6 * ---	2	
A	EP 0 724 249 A (IBM) 31 July 1996 * page 2, line 49 - line 56 * * page 3, line 39 - line 52 * ---	1,2	G09G
A	EP 0 601 647 A (PHILIPS ELECTRONICS NV) 15 June 1994 * column 7, line 11 - line 29 * * column 8, line 5 - line 52 * * claims 1,2 * * figure 2 * ---	1,2	
P,A	US 5 604 514 A (HANCOCK STEVEN M) 18 February 1997 * column 3, line 26 - column 5, line 5 * * figure 1 * -& JP 07 210134 A ---	1	
A	-/---	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 April 1999	Examiner Farricella, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 11 9126

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P, A	WO 97 16788 A (SIERRA SEMICONDUCTOR CORP) 9 May 1997 * abstract *	1	
A	WO 91 18353 A (CHIPS & TECH INC) 28 November 1991 * page 2, line 19 - line 21 * * page 3, line 14 - line 20 * * page 7, line 1 - line 8 * * page 8, line 3 - line 13 * * claims 2,5 * * figures 1,2 *	2	
A	EP 0 384 419 A (IBM) 29 August 1990 * page 9, line 41 - line 51 * * page 10, line 4 - line 11 * * figures 4,5 *	2	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Place of search THE HAGUE		Date of completion of the search 20 April 1999	Examiner Farricella, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.92) (P04C01)



European Patent
Office

Application Number

EP 97 11 9126

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 97 11 9126

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claim : 1

An on screen display system including a hardware window controller, a cpu, a memory and a display device.

2. Claim : 2

An on screen display system including a hardware window controller, a fifo, a decoder, a display controller, an attribute memory, line and pixel counters and an address calculator.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 11 9126

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-04-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4953027 A	28-08-1990	EP 0408834 A	23-01-1991
		EP 0883292 A	09-12-1998
		JP 3174882 A	30-07-1991
		KR 131586 B	16-04-1998
EP 0276884 A	03-08-1988	FR 2610160 A	29-07-1988
		DE 3869974 A	21-05-1992
		JP 63193177 A	10-08-1988
		KR 9700824 B	20-01-1997
		US 4866524 A	12-09-1989
EP 0280582 A	31-08-1988	AT 125379 T	15-08-1995
		DE 3854165 D	24-08-1995
		GB 2202115 A,B	14-09-1988
		JP 1014678 A	18-01-1989
EP 0724249 A	31-07-1996	US 5703622 A	30-12-1997
		JP 8248932 A	27-09-1996
EP 0601647 A	15-06-1994	CN 1092923 A,B	28-09-1994
		DE 69309621 D	15-05-1997
		DE 69309621 T	30-10-1997
		JP 6303423 A	28-10-1994
		SG 44005 A	14-11-1997
		US 5448307 A	05-09-1995
US 5604514 A	18-02-1997	JP 7210134 A	11-08-1995
WO 9716788 A	09-05-1997	US 5808630 A	15-09-1998
WO 9118353 A	28-11-1991	NONE	
EP 0384419 A	29-08-1990	DE 69020753 D	17-08-1995
		DE 69020753 T	14-03-1996
		JP 1750556 C	08-04-1993
		JP 2250585 A	08-10-1990
		JP 4032593 B	29-05-1992
		US 5283561 A	01-02-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)